



MADE IN  
**WAUSAU**  
TERRAZZO TILES  
BY WAUSAU TILE



daltile®

# River Run Terrazzo


Terrazzo tiles shown are only a representation of actual colors. Please request samples for accurate colors.




Spring Mist TZ01




Foggy Day TZ03

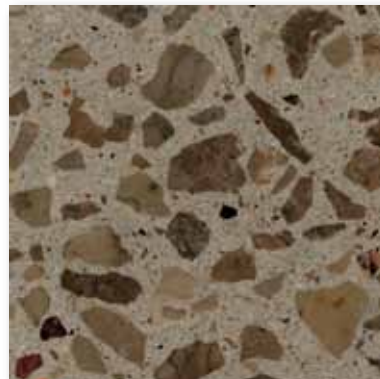


Outer Banks TZ02

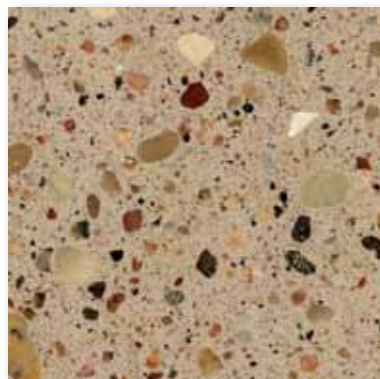


Coral Sands TZ07

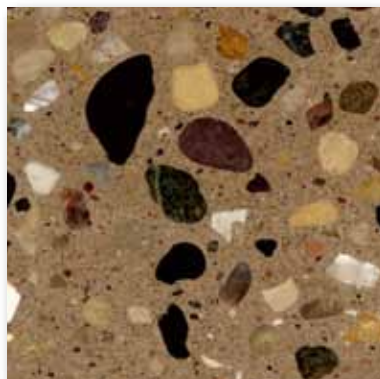


Drift Wood TZ05

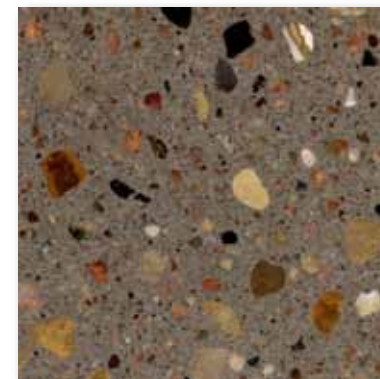


River Rock TZ08

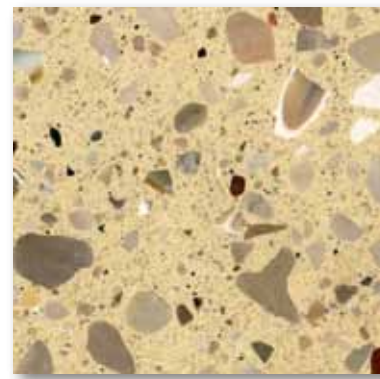

Sunny Shores TZ09

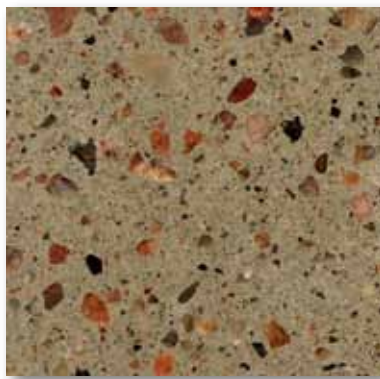


Tree Moss TZ06

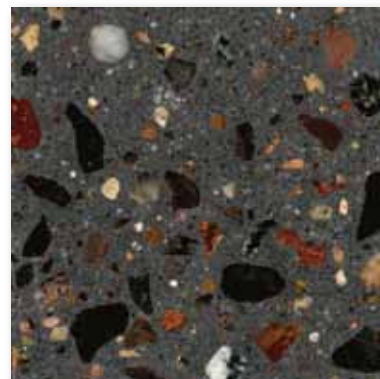


Deep Waters TZ04

# Micro Terrazzo


Terrazzo tiles shown are only a representation of actual colors. Please request samples for accurate colors.

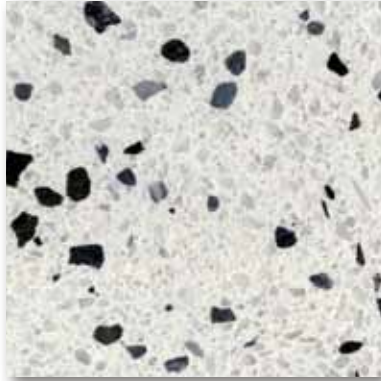


Full Moon TZ10

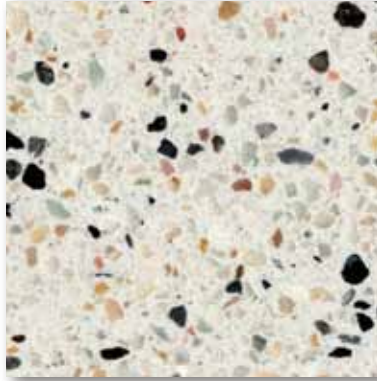


Comet TZ13

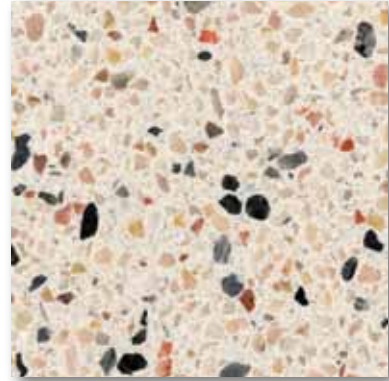


Stardust TZ14

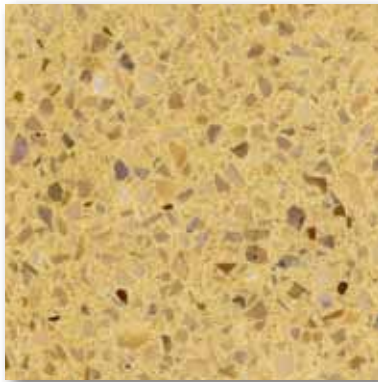


Saturn's Ring TZ20

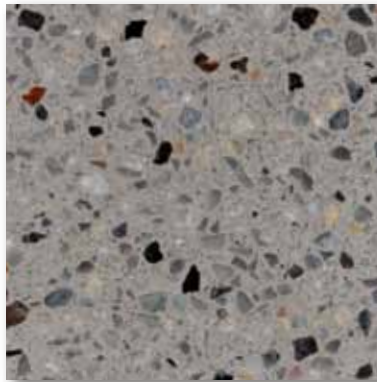


Gray Matter TZ15

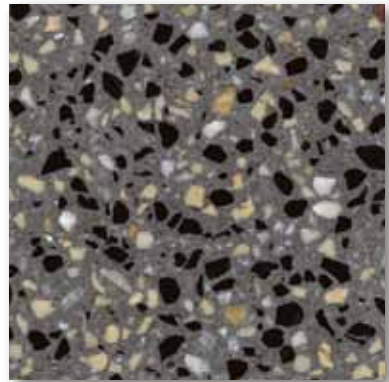


Meteor TZ18

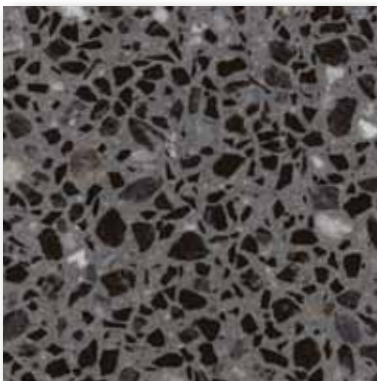


Eclipse TZ16

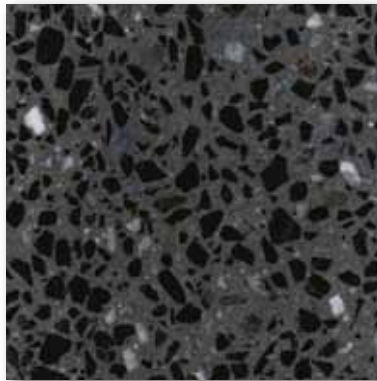


Black of Night TZ17

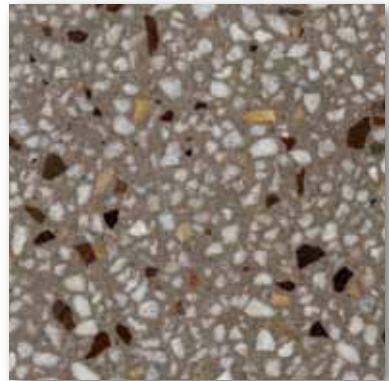


Nebula TZ12

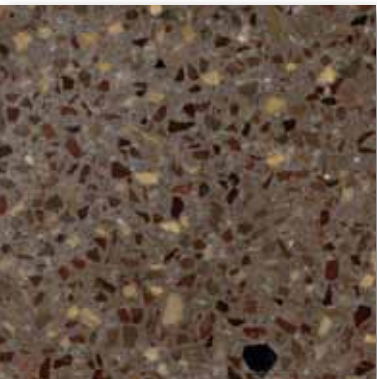

Mercury Rising TZ11

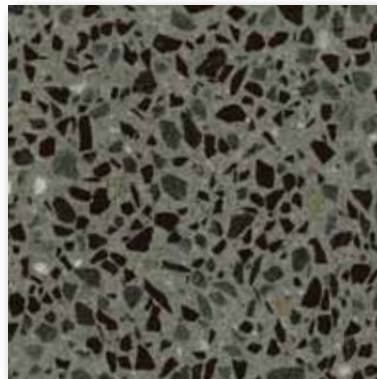


Earth Bound TZ19

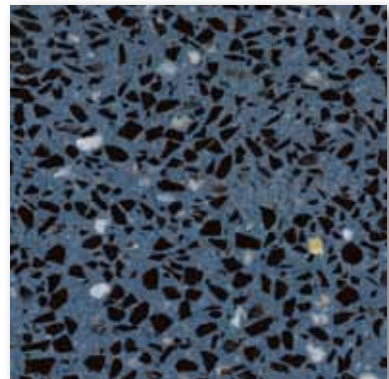


Stratosphere TZ21

# Traditional Terrazzo


Terrazzo tiles shown are only a representation of actual colors. Please request samples for accurate colors.

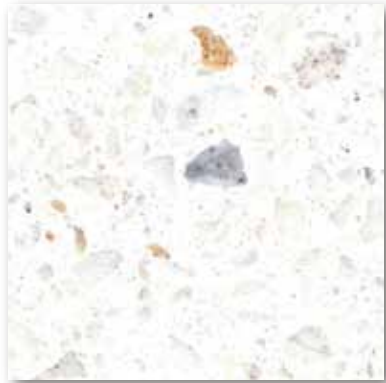


Parchment TZ22

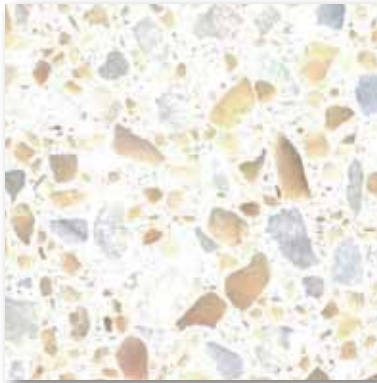


Flax TZ23

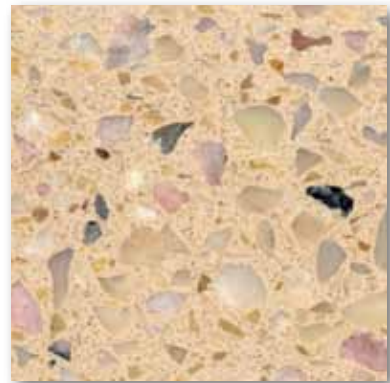


Ginger TZ29

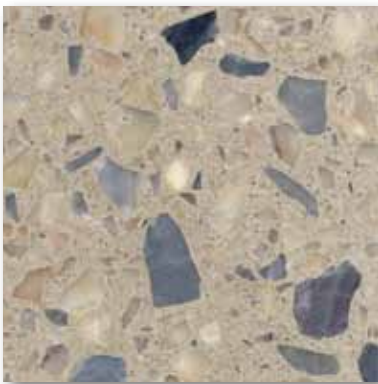


Sage TZ26

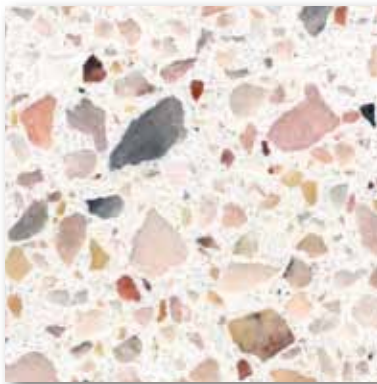


Pink Champagne TZ36

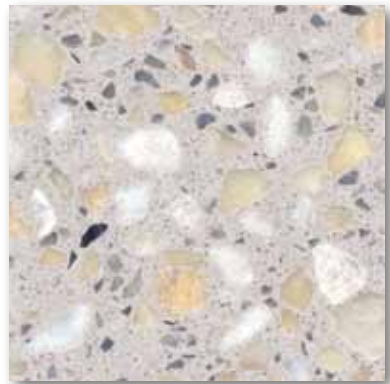

Jute TZ24

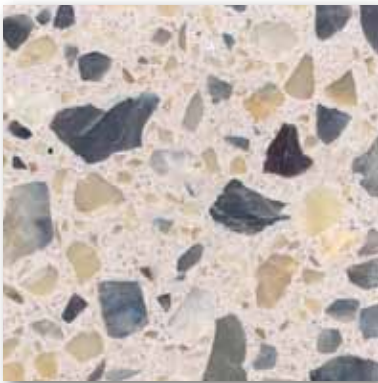


Morning Dove TZ25

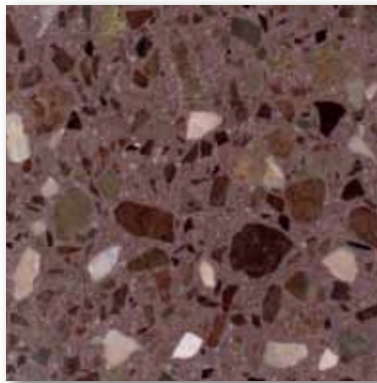


Cinnamon TZ28




Fresh Lime TZ40

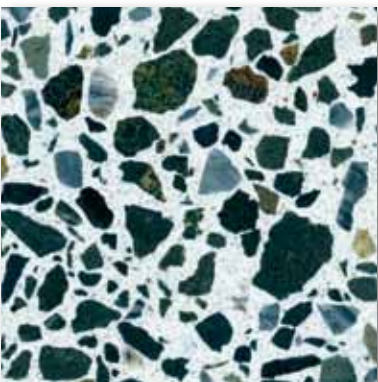

Spearmint TZ37

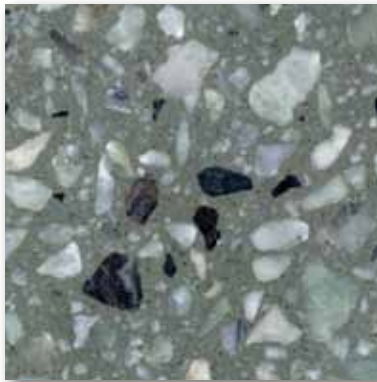

Green Tea TZ39

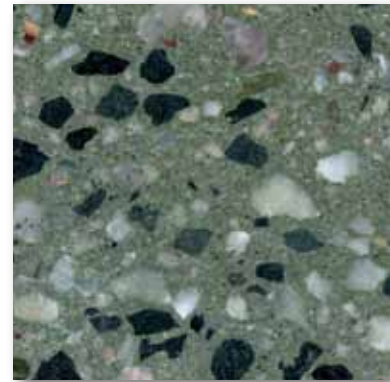


Mint Julep TZ38

# Traditional Terrazzo


Terrazzo tiles shown are only a representation of actual colors. Please request samples for accurate colors.




Crushed Ice TZ30

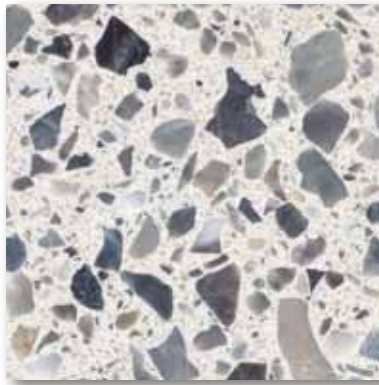


Cottage Grey TZ31

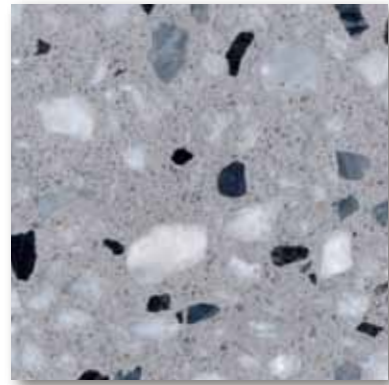


Turtle Dove TZ35

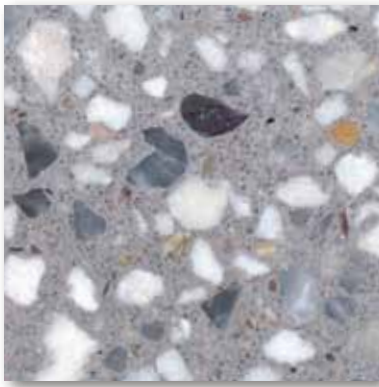


Oyster Shell TZ32

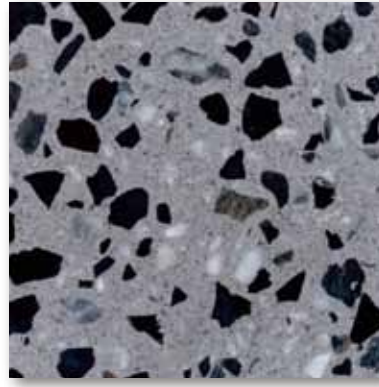

Graphite TZ33

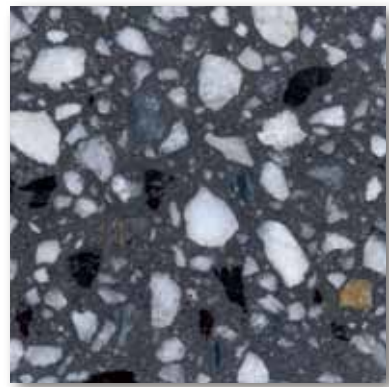

Night Owl TZ34

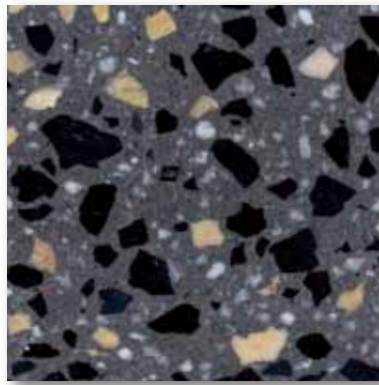

Peppercorn TZ27



# Recycled Glass Terrazzo


Terrazzo tiles shown are only a representation of actual colors. Please request samples for accurate colors.




Swiss Alps TZ41




Key West TZ45

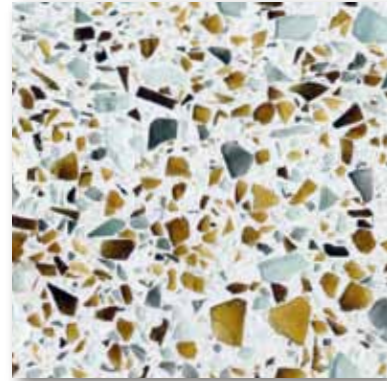


Barbados TZ47

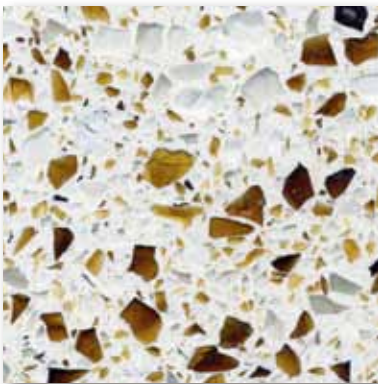


Riviera TZ48

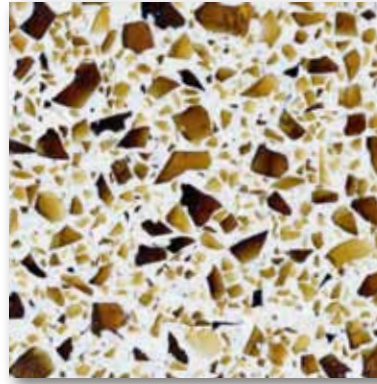


Morocco TZ46

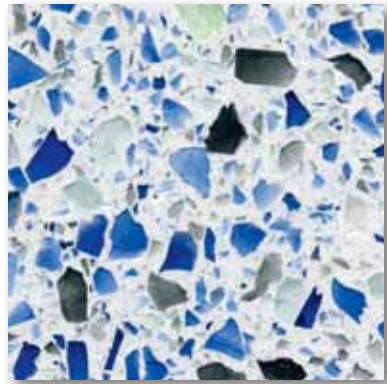


St. Tropez TZ43

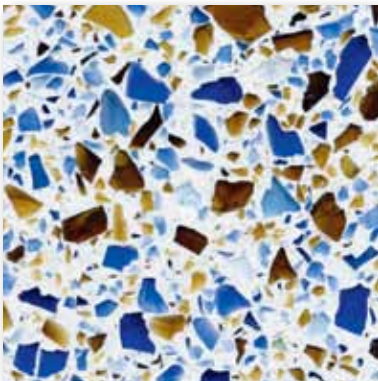


Cancun TZ44

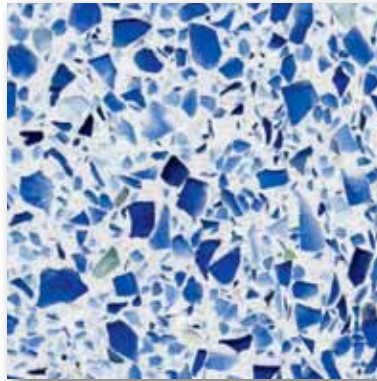

Blue Hawaii TZ42

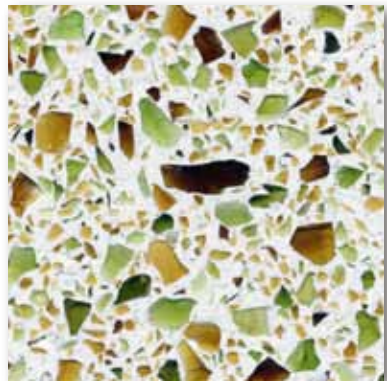

Amazon TZ49

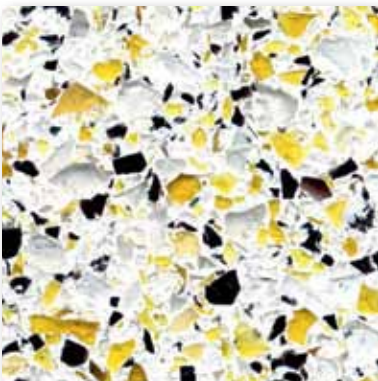

Rio TZ50

## “Green” and LEED - Important Notice:

In general, products alone don't earn LEED points, it's what the products contribute to the entire project that earn the points.

For example, our concrete based products using recycled glass are “Green”, but how much these products can contribute toward LEED points depends on:

- the amount or percentage of glass used
- where your project is located
- where our supply of glass originates
- what percentage of the total project cost was spent on the product



# Installation Methods


## 09300 Specification - Tile-Set Method

Terrazzo tiles are manufactured with a high-polished surface and chamfered edges. The tiles are not factory sealed. Terrazzo tile is installed following the Tile Council of America (TCA) specification for installation - F111, F112 and F113. Expansion control - EJ171 and crack isolation guidelines should also be followed. The substrate must have a 1/8" in ten foot tolerance to maintain a quality installation.

Our single layer thin terrazzo tile is provided unsealed. A grout release or seal coat must be applied to the tile prior to grouting. After the grout has dried, follow manufacturer's instructions for removal of the grout release. Clean the floor thoroughly with a neutral pH cleaner and apply the final floor seal with a product compatible with cement terrazzo, following the sealer manufacturer's instructions. Refer to the architect's specifications for the specified maintenance program.




### F111 Cement Mortar, Cleavage Membrane

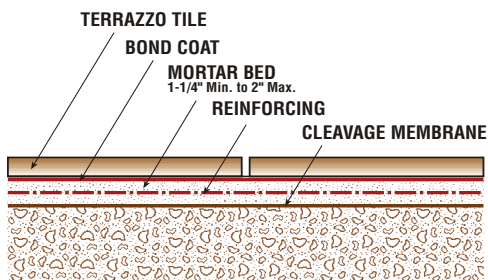


Water-jet technology is the quickest, most efficient method of cutting tile, achieving the ultimate in design, accuracy and eye appeal. Arcs, circles and other intricate designs can be cut using the precise water-jet cutting techniques.


### EJ171 Saw Cuts or Cold Joints

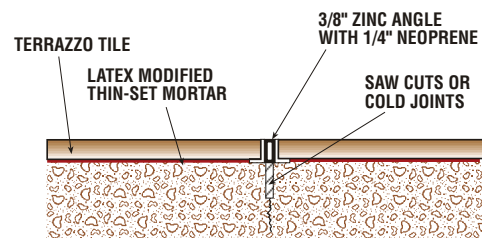


### F112 Cement Mortar, Bonded

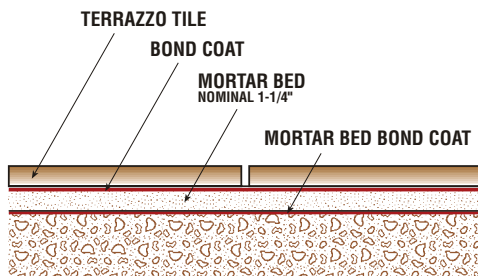

### Crack Isolation Membrane

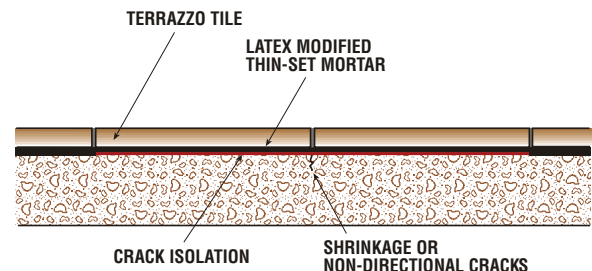

### F113 Dry Set Mortar or Latex-Portland Cement Mortar, Bonded

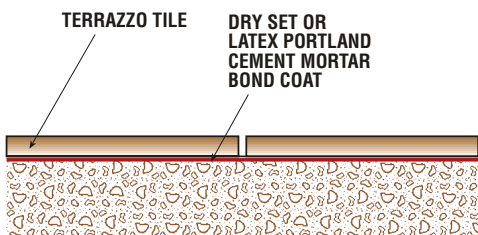

# Terrazzo Flooring Product Summary

Style	Installation Method	Finish	Edges	Aggregate Size	Dimensions Tolerances	Approximate Weight per SF	WT Colors	Custom Colors
Micro/WM Accent/WA	TSM**	<ul style="list-style-type: none"> <li>Polished</li> <li>Honed</li> <li>Brushed</li> </ul>	Chamfered Edge	3/16" minus	11 13/16" x 11 13/16" x 1/2" 15 13/16" x 15 13/16" x 5/8" 17 13/16" x 17 13/16" x 5/8" 23 13/16" x 23 13/16" x 7/8"	7 lbs. 8 lbs. 8 lbs. 11 lbs.	9 WM 3 WA	YES
Traditional/WT River Run/WRR	TSM**	<ul style="list-style-type: none"> <li>Polished</li> <li>Honed</li> <li>Brushed</li> </ul>	Chamfered Edge	WT 3/8" - 3/16" minus WRR 3/16" - 1/4"	11 13/16" x 11 13/16" x 1/2" 15 13/16" x 15 13/16" x 5/8" 17 13/16" x 17 13/16" x 5/8" 23 13/16" x 23 13/16" x 7/8"	7 lbs. 8 lbs. 8 lbs. 11 lbs.	19 WT 9 WRR	YES
Glass/TG	TSM**	<ul style="list-style-type: none"> <li>Polished</li> <li>Honed</li> <li>Brushed</li> </ul>	Chamfered Edge	3/8" - 1/4"	11 13/16" x 11 13/16" x 1/2" 15 13/16" x 15 13/16" x 5/8" 17 13/16" x 17 13/16" x 5/8" 23 13/16" x 23 13/16" x 7/8"	7 lbs. 8 lbs. 8 lbs. 11 lbs.	10 TG	YES

\*\* Tile Set Method

## Terrazzo Flooring Physical Properties

Property	Value	Test Method	Property	Value	Test Method
Compressive Strength (min)	8,000 psi Average	ASTM C140	Warpage (Along any edge) (Either diagonal)	+/- 1.5 %	—
Water Absorption	4.5%	ASTM C140	Static Coefficient of Friction	+/- 1.5 %	—
Flexural Strength	950 psi Average	ASTM C293	Polished Finish	Dry >0.7 Wet >0.5	ASTM C1028
Wedging	<1%	—	Honed Finish	>0.7	
			Brushed Finish	>0.7	

Specifications subject to change without notice.



**daltile**<sup>®</sup>

7834 C.F. HAWN FREEWAY  
 DALLAS, TX 75217  
 214.398.1411 / 800.933.TILE  
[www.daltileproducts.com](http://www.daltileproducts.com)